# SIEVR

TOMORROW'S PERFORMANCE TODAY



# STFYR AUG-SA

AUXILLARY

Constructed of fiber glass reinforced Zeytel, an advanced synthetic material unaffected by extreme environmental conditions. It is highly impact resistance

### **BULLPUP DESIGN**

Allows overall length of only 31" (with

### **EJECTION PORT**

Also located on left side

to allow left hand conversion.

20" barrel). Ideal for confined spaces.

1.5 power built-in optic incorporated into carrying handle. Ring reticule to assist range finding and target acquisition in poor light condition.

### **OPEN SIGHTS**

### \*BOLT ASSEMBLY

Multi- lug recessed head riding on dual hard chrome carrier rods.

BOLT FORWARD

## SAFETY FRONT SLING SWIVEL TAKE DOWN LATCH

### **REAR SLING SWIVEL**

Also acts as take down pin allowing quick access to entire hammer group.

MAGAZINE High impact resistant material that is also transparent to allow user to check number of rounds at a glance.

### **CLEANING KIT**

Located inside butt under easily removeable butt plate (Kit includes oiler).

### FLOOR PLATE

MAGAZINE RELEASE

Conveniently positioned

for rapid ambidextrous nagazine removal

Quick-detach floor plate allows rapid disassembly for magazine cleaning.

### RECEIVER HOUSING

Precision anodized aluminum reinforced with tough tool steel in functional areas for low weight, strength and corrosion

### MODULAR PISTOL GRIP

Affords protection to firing hand and allows multiple rest and steadying positions. Also allows firing with glove.

## STEYR AUG-SA 5.56mm x 45mm (.223 Rem.)



The Steyr AUG-SA is unquestionably the most advanced semi-automatic rifle ever assembled and is truly on the cutting edge of "the new generation" of Steyr weaponry. In fact, the AUG-SA is so advanced in technology and design that it has no peer. The simplicity of the AUG-SA design literally offers unparalleled accuracy, greater versatility and interchangeability, simplicity of training and both quick and easy cleaning. These factors make the AUG-SA the best operating, highest performing auto-loading rifle ever developed. And through the use of high technology and advanced synthetics the AUG-

SA is not only light in weight, but unmatched in reliability and durability. The AUG-SA stock is extremely impact resistant and resists deformation in temperatures as high as  $+100^{\circ}$  centigrade and as low as  $-40^{\circ}$  centigrade. It is also unaffected by harsh environmental conditions such as sand, mud, mois-

The AUG-SA is truly the most advanced auto-loading rifle in the world today.

## The world's most advanced auto-loading rifle...and system.

### BARREL

Cold hammer—forged steel. Chrome lined including chamber for 15,000 round minimum barrel life.

### BARREL RELEASE BUTTON

Allows quick removal of barrel even

### FLASH HIDER

Advance Engineered for maximum flash suppression with minimum bulk.

### BARREL INTERCHANGEABILITY

Instant interchangeable barrel assemblies (available in 16, 20 and 24 inch lengths).

### GAS PLUG

Short stroke, direct action gas system adjusts externally for adverse and extreme

### FOREGRIP

Also folds under barrel to permit firing from rest.



### COMPACT. EFFICIENT AND RELIABLE DESIGN.

- 1—Barrel Assembly 3—Housing Assembly
- 2—Bolt Assembly
- 5—Magazine Assembly
- 4-Stock Assembly 6—Hammer Assembly



1-LEFT HAND CONVERSION-allows leftside ejection for left handed shooters. WARN-ING: Essential for safe operation for left shoul der use. Optional conversion kit consists of left-hand bolt, assembly and reversal of ejection

2-BARREL INTERCHANGEABILITY-The AUG-SA offers quick change ability in three barrel lengths. Aside from the 20" standard assembly two other barrels are available in 16 and 24 inch lengths

3—BUILT-IN OPTIC—The optical sight is built into the carrying handle and its 1.5 magnifica-tion gives a wide field of sight. Furthermore, it is possible to fire with both eyes open for quicker and easier sighting and firing. Auxillary open sights on top can be used for quick roughspotting of target. Optional dot or crosshail



4-SCOPE MOUNT RECEIVER-Another versatile feature of the AUG-SA is the ability to change receivers. The optional scope-mount receiver (shown above) extends the use of virtually any sighting device and quick change mounts allows changing scopes without resighting.

5-ADVANCE SYNTHETICS-Highly advanced synthetic materials are incorporated throughout the AUG-SA making it light in weight (only 7.9 lbs.) and exceedingly durable These special components not only outperform their predecessors—they offer long life, greater stability and easy maintenance of

6-OPTIONAL ACCESSORIES-The versatil ity of the AUG-SA system is extended even further with the wide range of accessories available. Available are Sight Adjusting Tool, Blank Firing Device, 42 Round Magazine, Bayo-net, Scope Mount Rail, and SSG Rings for



# STEYR SSG-PII

The Black ABS Cycolac stock has no

of conditions. Unlike wood it is unaf-

and is rugged to resist tough handling.

fected by moisture and climage changes

personality, but it performs in the worst

# The most dependable and rugged defense weapon ever developed for police use.

### SAFETY

Military-type two position safety.

### POI 1

Phosphate-coated to eliminate glare and binding in extreme weather conditions.

### LUGS

Six heavy-duty rear-locking lugs.

### **BOLT HANDLE**

Larger, modified bolt handle for sure grip and quick action reloading.

### **COCKING INDICATOR**

Shows when firing pin is cocked.

### **OPTICS**

Optional special Kahles steel-tube ZF84 6X scope with adjustable dial range from 110 to 880 yards. Calibrated to adjust automatically for drop and drift of the bullet, allowing the shooter to maintain a constant point of aim and point of impact.

### BARREL SEAT

**SCOPE MOUNTS** 

26mm or 30mm tube optics.

Receiver is shrunk (by heating and then cooling) on to 2½ inches of the cold hammer forged barrel. This is done to obtain optimal connection between the receiver and barrel.

Optional parkerzied NATO-standard

quick-detachable mounts can accommodate any U.S.—or foreign-made 1-inch,

### ACTIC

Heavy-duty right-handed action with a closed front and rear bridge offers shooters the utmost in safety and strength. Features an integral dovetailed, NATO-standard scope-mounting system.

### FINISH

Non-glare parkerized finish for better metal protection and easier maintenance.

### **HEAVY BARREL**

26-inch, heavy barrel, free-floating. cold-hammered, tapered bore: twist one turn in 12 inches.

TRIGGER
Fully external, adjustable, crisp single
trigger. Weight of trigger pull is adjustable
from 2.5 to 4.7 pounds. (Double set triggers
are also available as pictured at no extra charge.)

### TRIGGER GUARD MAGAZINE HOUSING

Made of aerospace-developed Macrolon to achieve lightweight, to eliminate rust and to quarantee durability.

### DDIC

The SSG-PII offers features and advantages found only in high-priced custommade target rifles. No other production rifle can compare with it—at any price.

### PERFORMANCE

Consistent grouping within one minute of angle at 300 yards is a traditional Mannlicher characteristic.

### MAGAZINE

Macrolon rotary magazine with fiveround capacity. (NOTE: Magazine holds cartridges at the shoulder, preventing damage to bullet tips and allowing smooth loading and straight-line feeding—a well-known characteristic of Mannlicher rifles.)

### **SWIVELS**

One inch swivel adjustable for travel on black anodized metal rail.

### **EXCLUSIVITY**

The SSG-PII is an original Steyr Mannlicher product, painstakingly built by a respected company manufacturing military arms for more than 100 years and known the world over for the quality of its products, workmanship and technological provation.

### SPACERS

Removable spacers allow length of pull to be adjusted between 12.5 and 14 inches, thus enabling the SSG to be fitted to shooters of all statures permitting proper scope eye-relief.


## STEYR SSG-PII

7.62 x 51mm (.308 Win.) and .243 Win.

What makes the Steyr SSG-PII the ultimate police sniper rifle? The precision you need. The performance you demand. And the dependability you can't afford to be without.

The SSG-PII offers the advanced features you expect from Steyr-Mannlicher: a large modified bolt handle, NATO-standard quick-detach scope system, adjustable sling rail, tough ABS cycolac stock, and your choice of single or double set triggers. The barrel is made of special Boehler cold-hammer forged steel with a twist of one turn in 12 inches—ideal for 165-168 grain match bullets.

When everything depends on the rifle you carry, you can depend on the Steyr SSG-PII.

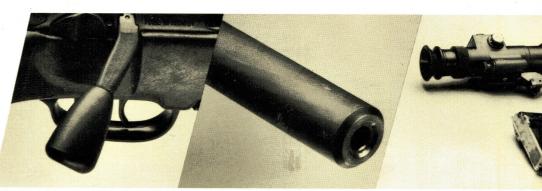

1—MODIFIED BOLT HANDLE—Large, modified bolt handle affords sure action when you need it. Loading and reloading is more rapid and easier—absolutely necessary in critical situations.

2—HEAVY BARREL—The 650mm/26 inch heavy free floating barrel is shrunken 2.5 inches into the receiver with over 10 tons of pressure to achieve optimum stability and eliminate barrel vibration. The Parkerized finish diminishes glare and offers better metal protection and easier cleaning.

3—OPTIONAL ACCESSORIES—The Steyr SGS-PII accepts a wide range of accessories to adapt to variant situations. The optional Litton M-845 night vision device (shown above) interchanges in less than 5 seconds while maintaining point of impact. Also shown is an optional 10-round magazine.



STEYR AUG-SA

Compact semi-automatic and multi-purpose rifle with intechangeable barrel

svstems

CALIBER: 5.56mm × 45mm (.223 Rem.), Gas-operated with adjustable gas plug. ACTION: STOCK: Synthetic, olive-green. One-piece moulding houses receiver group, hammer

mechanism and magazine.

HOUSING GROUP:

Receiver housing with optic sight (built directly into the carrying grip) slides into the stock from the front. Optional receiver housing available to accept NATO-STANDARD SCOPE mounting system or optional quick-detach scope mounts (1", 26mm or 30mm).

MAGAZINE:

MAGAZINE CAPACITY: SAFETY:

staggered magazine feeds from below. 30 round; 42 rounds (optional), Lateral push-through type locks trigger movement. Fixed locking turn-bolt type, with eight

locking lugs. Note: To convert the AUG to left-hand ejection; 1. replace bolt with optional interchageable left-hand bolt. 2. move ejection lid to right side of stock. 3. move sling swivel to right side of stock.

Detachable. Synthetic (transparent)

BOLT:

BARREL GROUPS:

RIFLING:

Interchangeable. 407mm/16", 508mm/ 20" and 621mm/24.5", with gas-pressure adapter and swing/pivot type barrel grip. Cold hammer-forged. Chrome-lined bore including chamber. Barrel locks into receiver body by rotating it one-

eighth turn.

Six lands and grooves, right-hand twist, one turn in 228mm/9" (for M193 or

SS109-type ammunition).

**OPTICAL SIGHT:** 1.5 power optical sight with windage

and elevation settings. Centered open aiming circle or other reticles (optional). With 407mm/16" bbl: 3.3 kg/7.2 lbs. standard: with 508 mm/20" bbl.: 3.6 kg/

7.9 lbs.

with 621mm/24.5" bbl.: 3.9 kg/8.6 lbs. O. 13 kg/5 oz.

MAGAZINE WEIGHT (EMPTY):

WEIGHT (EMPTY):

**OVERALL LENGTH:** 

With 407mm/16" bbl.: 690mm/27"; standard: with 508mm/20" bbl.:

790mm/31"

with 621mm/24.5" hhl : 900mm/35.5"

**OVERALL HEIGHT:** 275mm/11"

## STEYR **SSG-PII**

CALIBER:

RECEIVER:

BARREL:

Right-handed bolt acton rifle 7.62 × 51mm (.308 Win.) Cylindrical. Six heavy-duty rear-locking BOLT:

lugs; two gas ports; cocking indicator, recessed bolt face. Modified and larger

bolt handle.

Heavy-duty receiver with closed front and rear bridge. Dovetailed to accept NATO-standard scope mounting sys tem. Note: The barrel is shrunken 2.5 inches (53mm) into the receiver with a pressure of more than 10 tons. 650mm/26-inch, heavy free-floating barrel with match crown. Cold hammer

forged. RIFLING:

Four lands and grooves, right-hand twist, one turn in 305mm/12" **MAGAZINE TYPE:** Detachable. Straight-line feed rotary

drum magazine with transparent back plate. Made of rugged Macrolon. Note: Optional 10-shot magazine has stag-

MAGAZINE CAPACITY:

TRIGGER:

gered feed. 5 rounds; 10 rounds (optional). Single or double-set triggers (to allow the shooter in tactical situations to "set" the front trigger to fire with a pull of from two to eight ounces). Both

types are adjustable for weight of pull

SAFETY: SIGHTS: Sliding safety. No open sights.

Optional Parkerized NATO-standard **SCOPE MOUNTS:** quick-detachable Steyr mounts for 1",

26mm or 30mm scopes.

Optional Kahles steel tube ZF84 6X42 OPTICS:

scope with adjustable dial range from 110 to 880 yards (100-800m). Parkerized fin-

ish to prevent glare.

STOCK: Synthetic ABS CYCOLAC with moulded

checkering. Black color. Three remova-ble butt spacers allow length of pull to be adjusted between 12.5 and 14 inches (32.5-35.5cm). Includes black anodized mounting rail for sling or ac-

SWIVELS:

cessory attachment. 25mm/1". Front: detachable and adjust-able on mounting rail. Rear: transverse

mounted on butt (slot cut for sling on

left side of butt).

FINISH: Non-glare Parkerized finish on barrel and receiver

Synthetic Macrolon. Lightweight, rust-

proof and extremely durable. 113mm/44.5".

SSG-PII with magazine: 4.25 kg/9 lbs. 6

SSG-PII with ZF84 scope: 4.85 kg/10

lbs. 11 oz.;

empty magazine: 65 g/2.3 ozs.

## STEYR **SSG**

TVDF: CALIBER:

7.62 × 51mm (.308 Win.) and .243 Win

Right-handed bolt action rifle

BOLT:

Cylindrical. Six heavy-duty rear-locking lugs; two gas ports; cocking indicator; recessed bolt face.

RECEIVER:

Heavy-duty receiver with closed front and rear bridge. Dovetailed to accept NATO-standard scope mounting sys tem. Note: The barrel is shrunken 2.5 inches (53mm) into the receiver with a pressure of more than 10 tons. 650mm/26-inch, medium-heavy free

BARREL

floating barrel with match crown. Cold hammer-forged.

RIFLING

Four lands and grooves, right-hand twist, one turn in 305mm/12 Detachable. Straight-line feed rotary **MAGAZINE TYPE:** drum magazine with transparent back

plate. Made of rugged Macrolon. Note: Optional 10-shot magazine has staggered feed. 5 rounds; 10 rounds (optional).

MAGAZINE CAPACITY: TRIGGER:

Single or double-set triggers (to allow the shooter in tactical situations to "set" the front trigger to fire with a pull of from two to eight ounces). Both types are adjustable for weight of pull.

SAFETY: Sliding safety

OPTICS:

STOCK:

SWIVELS:

TRIGGER GUARD &

OVERALL LENGTH:

SCOPE MOUNTS:

**WEIGHT:** 

MAGAZINE HOUSING:

Iron sights. Front: hooded ramp with SIGHTS:

blade, adjustable for elevation. Rear: slanted V-notch, adjustable for

windage.

Optional Parkerized NATO-standard quick-detachable Steyr mounts for 1",

26mm or 30mm scopes. Optional Kahles steel tube ZF84 6X

scope with adjustable dial range from

110 to 880 yards (100-800m). Parker-

ized finish to prevent glare.

Synthetic ABS CYCOLAC with moulded

checkering. Black color. Three removable butt spacers allow length of pull to

be adjusted between 12.5 and 14 inches (32.5-35.5cm).

25mm/1". Front: permanently mounted on fore-end tip. Rear: transverse

mounted on butt (slot cut for sling on left side of butt).

FINISH: Non-glare Parkerized finish on barrel and receiver

TRIGGER GUARD & **MAGAZINE HOUSING: OVERALL LENGTH:** WEIGHT:

Synthetic Macrolon. Lightweight, rustproof and extremely durable. 113mm/44.5".

SSG with magazine: 4.08 kg/9 lbs.; SSG with ZF84 scope: 4.68 kg/10 lbs. 5 oz.; empty magazine: 65 g/2.3 ozs.



GUN SOUTH, INC. P.O. Box 129 — Trussville, AL 35173 USA Telephone (205) 655-8299 — Telex 782113